

Photo-cell controller

NightMatic 2000

black

EAN 4007841 550318



Twilight switch

1000w

1000 W max.
(LED-ready)



IP54



2 - 30 lux



energy saving



3 JAHRE
HERSTELLER
GARANTIE
steinel.de/warranty



CE



TÜV Nord
Baumuster
checked

Function description

Automatic illumination. Photo-electric lighting controller NightMatic 2000 for controlling lighting systems for building fronts, properties, shop windows etc., automatically switches light 'ON' at dusk automatically 'OFF' again at dawn.

Technical specifications

Type	Photo-cell controller	Constant-lighting control	No
Dimensions (L x W x H)	37 x 74 x 99 mm	Basic light level function	No
Mains power supply	230 – 240 V / 50 Hz	Settings via	Potentiometers
Power consumption	0,8 W	Interconnection	Yes
Sensor Technology	Light sensor	Type of interconnection	Master/master
Application, place	Outdoors	IP-rating	IP54
Installation site	wall	Material	Plastic
Installation	Surface wiring	Ambient temperature	-20 – 50 °C
Twilight setting TEACH	Yes	Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Twilight setting	2 – 30 lx	Colour	black
Switching output 1, resistive	1000 W	Colour, RAL	9005
Switching output 1, number of LEDs / fluorescent lamps	4 pcs	Manufacturer's Warranty	3 years
Fluorescent lamps, uncorrected	500 VA	Version	black
Capacitive load in µF	88 µF	PU1, EAN	4007841550318

Photo-cell controller


NightMatic 2000

black

EAN 4007841 550318



Dimension Drawing

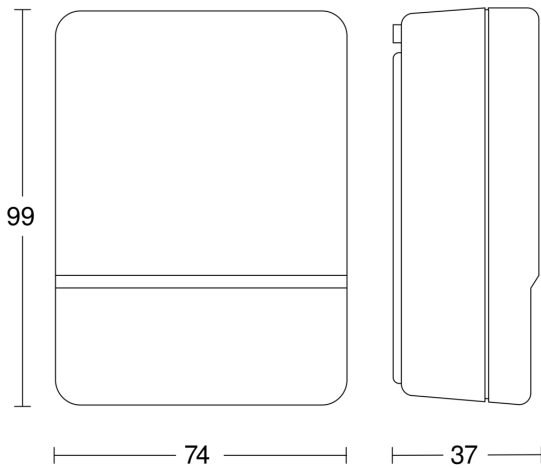

Ташев-Галвинг ООД
www.tashev-galving.com