
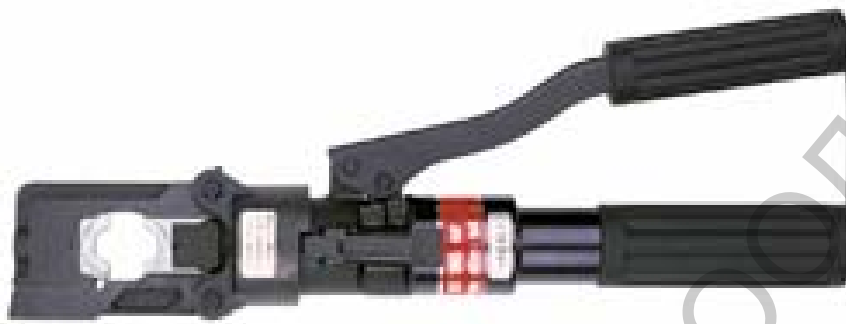



**RENNSTEIG**

ТЕХНИЧЕСКА ХАРАКТЕРИСТИКА

Челюсти резервни за клещи за кабели



Profile – профил на челюстите	Range of application- област на приложение	Art. No. – арт.номер	Dies - челюсти	Capacity mm ² Cu – капацитет в мм ² за медни	Capacity mm ² Al – капацитет в мм ² за алуминий
	Hexagon Crimping dies	630 201 5	К 6/К 16-7	10+70	50
	for copper	630 202 5	К 8/К 12-7	16+35	10+25
	terminals/connectors	630 203 5	К 10/К 14-7	25+50	16+35
	(DIN 46 235) and	630 204 5	К 18-5	95	
	aluminium	630 205 5	К 18-7		70
	terminals/connectors	630 206 5	К 20-5	120	
	за медни и алуминиеви	630 207 5	К 22-5	150	
	терминали/кабели,	630 208 5	К 22-7		95+120
	с(профил шестостен) –	630 209 5	К 25-5	185	
	съответно (DIN 46 235)	630 210 5	К 25-7		150
и (DIN 46 329)					