

Base mounted

→ Single extension

Load bearing capacity up to 25 kg




Commercial and industrial packaging available.
Continuous quality control in accordance with DIN-EN 15 338 test parameter 2


- Material: Steel
- Finish/colour: Plastic coated, White, RAL 9010, white aluminium, similar to RAL 9006, black, RAL 9011 or brown, RAL 8017
- Height adjustment: Using slotted holes in the cabinet rail
- Type of closing: Self closing
- max. drawer width: Internal cabinet width – 25 mm
- Installation: At drawer, base mounted

Drilling pattern

Cabinet front edge

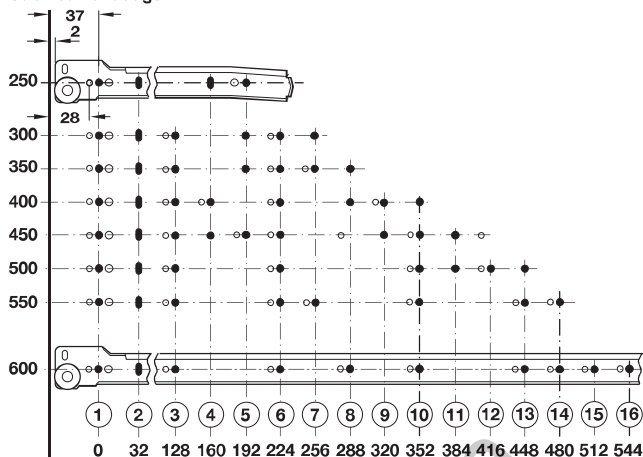

Installation



7

Installation length L mm	Extension length AL mm	Extension loss AV mm	Packing pairs	White, RAL 9010	White aluminium, RAL 9006	Black, RAL 9011	Brown, RAL 8017
Commercial packaging							
250	163	87	20	423.08.726	423.08.226	423.08.326	423.08.126
300	213	87	20	423.08.731	423.08.231	423.08.331	423.08.131
350	263	87	20	423.08.736	423.08.236	423.08.336	423.08.136
400	313	97	20	423.08.741	423.08.241	423.08.341	423.08.141
450	363	97	20	423.08.746	423.08.246	423.08.346	423.08.146
500	413	97	10	423.08.751	423.08.251	423.08.351	423.08.151
550	433	117	10	423.08.756	423.08.256	423.08.356	423.08.156
600	483	117	10	423.08.761	423.08.261	423.08.361	423.08.161
Industrial packaging							
300	213	87	100	423.08.732	–	–	–
350	263	87	100	423.08.737	–	–	–
400	313	97	50	423.08.742	423.08.242	–	–
450	363	97	50	423.08.747	–	–	–
500	413	97	50	423.08.752	423.08.252	–	–

Order reference

Industrial packaging: Single parts packed separately in boxes

Commercial packaging: Packed in pairs

Soft and self closing mechanism FF 7.50

Information > FF 7.7

DGH-M-INT 2008, HDE-en, 09/08. Dimensional data not binding. We reserve the right to alter specifications without notice.